

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 24 TOWNSHIP 17 RANGE 3

DATE: 3-18-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Mag nail set over broken

METHOD OF ESTABLISHMENT: County: Harrison

3-20-99



IN. S.P.C. E ZONE NAD '83

NAME: 17032402

N: 517906.1500(m)

E: 59842.8460(m)

86th Street 8600 N

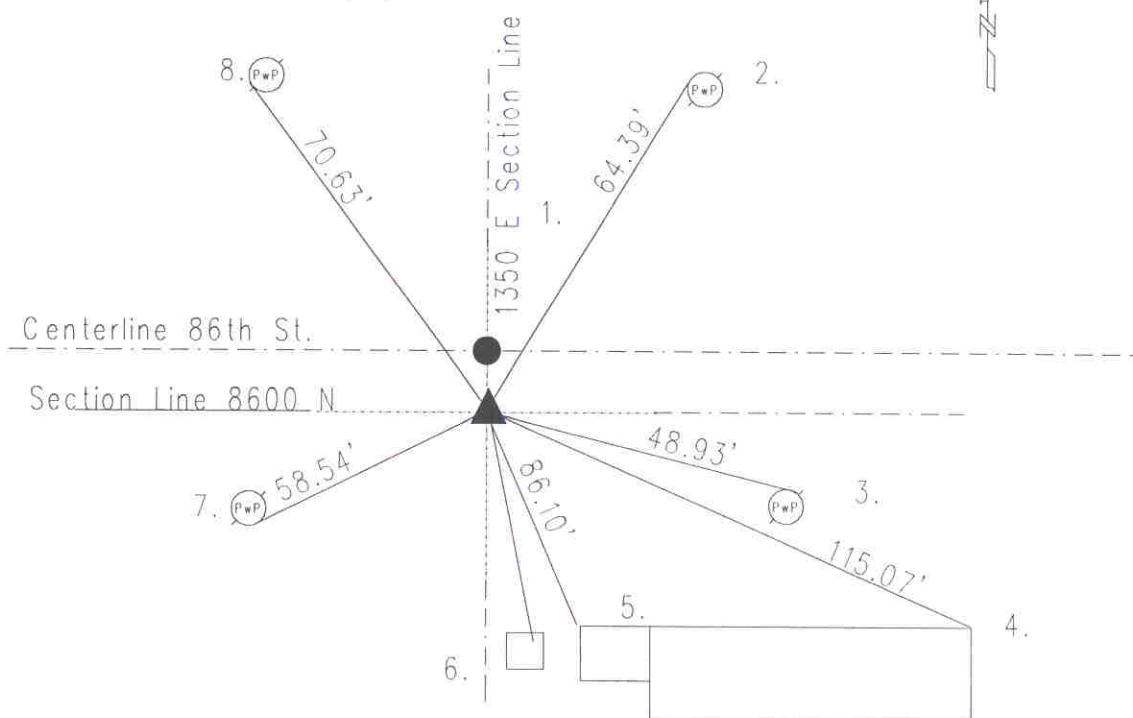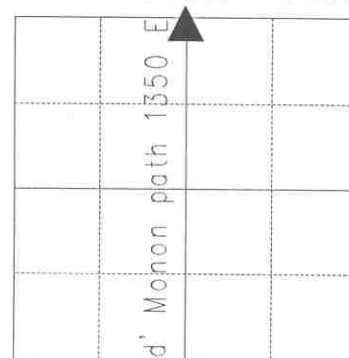

Original post set 1820 by Wm. B. Laughlin with witnesses: 14" beech S 58 W 11 links, 12" hickory S 58 E 17 links per Marion County Atlas pg. 8. There is no mention of stones nor monuments in Washington Township Legal Survey Book. Best 10-29-47 called no monument described. Woerner 6-22-48 called no monument described. Unversaw 9-29-54 called same. Miller 3-22-76 called railroad spike. Gries 12-21-87 called brass plug. Wilcoxon excavated corner 11-2-89 and replaced brass plug with a Harrison per 86th Street construction project. Re-tied 3-20-99 by Wilcoxon. Re-tied 3-18-03 by Wilcoxon.

17032402

REF.	DISTANCE	DESCRIPTION
1.	9' +/-	Due N to C/L of 86th Street
2.	64.39'	PK nail NW PwP#110-208 B 10"up
3.	48.93'	Mag nail w/brass washer NE PwP#109-208 B 6"up
4.	115.07'	NE corner of brick "Chris Ice Cream"
5.	86.10'	NW corner "
6.	47.27'	Cut 'x' NE corner of concrete column
7.	58.54'	PK nail SE PwP#220-208 B 6"up
8.	70.63'	PK nail W PwP#201-208 A 15"up